

TRANSPORT UNIT WITH OPTIONAL RAIL GRINDING UNIT.



ITS BENEFITS. YOUR BENEFITS.

One carriage. Versatile material transportation.

- High loading capacity with large loading platform
- Installation of other modules with integrated twist lock connection
- Access ramp for loading and unloading of plant and equipment
- Ideal for maintenance in the underground

Optional: Grinding device under the frame with remote control.

- Increased rail life with the optional rail head grinding unit
- Elimination of railhead rust, leaf mulch and lubricator contamination
- Monitoring of the railhead condition with optional camera
- Wet and dry grinding is possible


EDV-Nr.: 6919900002 oder 6919900003

TECHNICAL SPECIFICATIONS

Weight	
Loaded	~ 26,5 to
Unloaded	~ 8,5 to
Max. Loading capacity	18 to
Max. Axle load	13,25 to
Track gauge	1435 mm
Dimensions loading platform	7410 x 2785 mm
Total length	8394 mm
Superelevation	max. 165 mm
Max. Speed	40 km/h
Grinding speed	10 - 15 km/h
Approval	BOStrab
Relevant set of standards	EN, UIC, EBO as far as usable

Dimensions and weights approximated. We reserve the right to modify in the course of technical development.

Prices excluding VAT. Copyright secured.

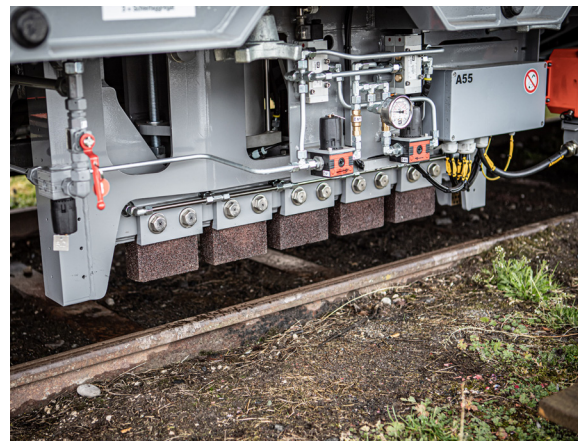

Link to the Video: <https://www.youtube.com/watch?v=hcBIG9rTv44>